

TRIAN

THE ACCENT THAT SPEAKS



Trian comes with elegant design and spotless optics, making it ready to beautify the most special landscapes.



TRIAN

TECHNICAL SPECIFICATIONS

GENERAL HIGHLIGHTS

- Equipped with Heper's Dyno S LED Module
- Operating Temperature -40°C / +55°C
- Exceptional thermal characteristics
- In compliance with EN 60598, EN 62722

ELECTRICAL PROPERTIES

- Drive current: 350mA
- Optimized PCB design
- Power factor: > 0.90
- Input Voltage: 220V - 240V, 110V - 120V (optional) at 50Hz / 60Hz
- Control type: On/Off, DALI (optional)

OPTICAL PROPERTIES





- Equipped with Heper's Dyno S LED Module
- Spotless light distribution
- MacAdam Elipse 3
- Lumen output (absolute photometry): 200lm - 250lm
- Color temperature: 3000K, 4000K, 2700K (optional)
- CRI > 70 (4000K), CRI > 80 (3000K)
- ULOR: 0

BODY HOUSING & FINISH

- Corrosion resistant aluminum housing
- Electrostatic powder coating
- HM1 to HM6 standard colors with optional RAL codes
- Ingress protection: IP65
- Impact protection: IK05

EXTRAS

- Higher CRI LED chips
- Marine grade body

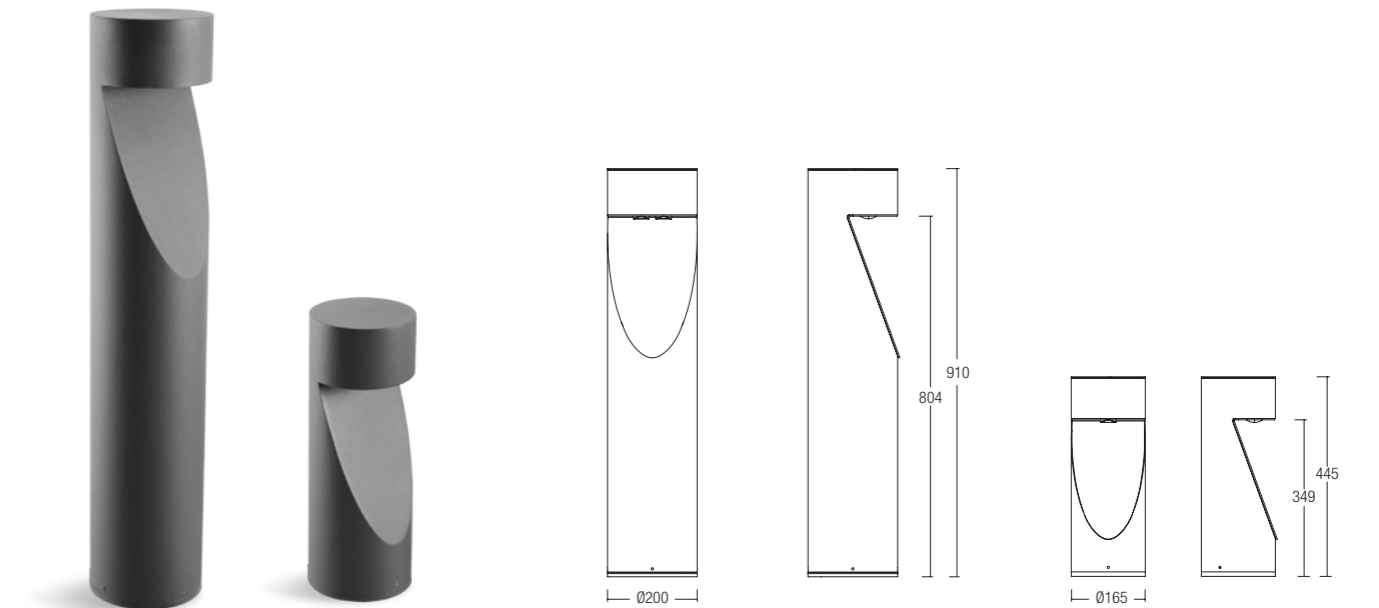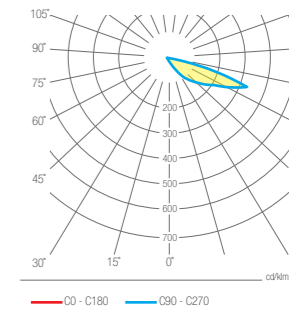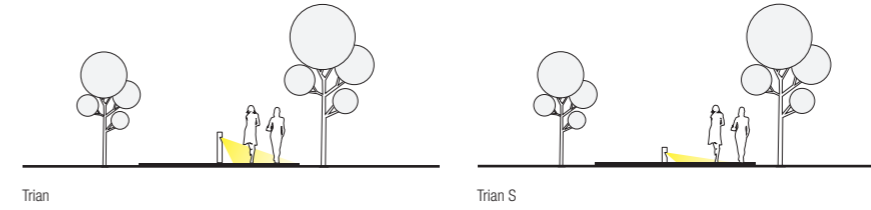

LUMINAIRE					
CODE	DESCRIPTION	POWER (350 mA)	LUMEN	COLOR TEMPERATURE	ANCHORAGE
LB6020.546	Trian	4W	200lm - 250lm	3000K / 4000K	629J014
LB6042.545	Trian S	2W	100lm - 125lm	3000K / 4000K	629J014